

WIRELESS BARCODE READER 1D / 2D

MANUAL




Settings

Default Settings		 %%SpecCode93
Sound	High*	 %%SpecCode97
	Medium	 %%SpecCode96
	Low	 %%SpecCode95
	Disable	 %%SpecCode94
Sleep Time	30 seconds	 %%SpecCode30
	1 minute	 %%SpecCode31
	2 minutes	 %%SpecCode32
	5 minutes*	 %%SpecCode33
	10 minutes	 %%SpecCode34
	30 minutes	 %%SpecCode35
	No sleep	 %%SpecCode36
	Sleep now	 %%SpecCode38
Language	English (QWERTY)*	 %%SpecCode40
	French (AZERTY)	 %%SpecCode42
	German (QWERTZ)	 %%SpecCode41
Battery level		 %%SpecCode15


*Default settings

Recharge

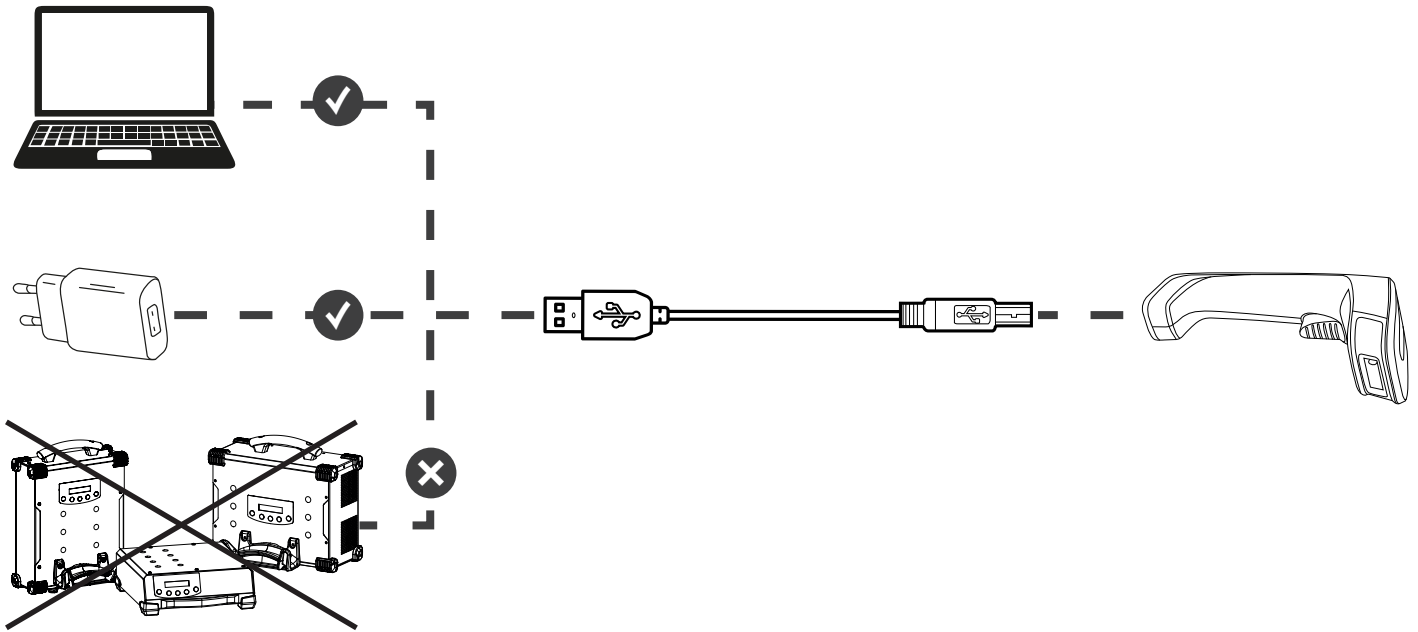

- DO NOT use the USB port on Gysflash to recharge the barcode scanner.
- Recharge your barcode scanner before first use.

Connect to Gysflash

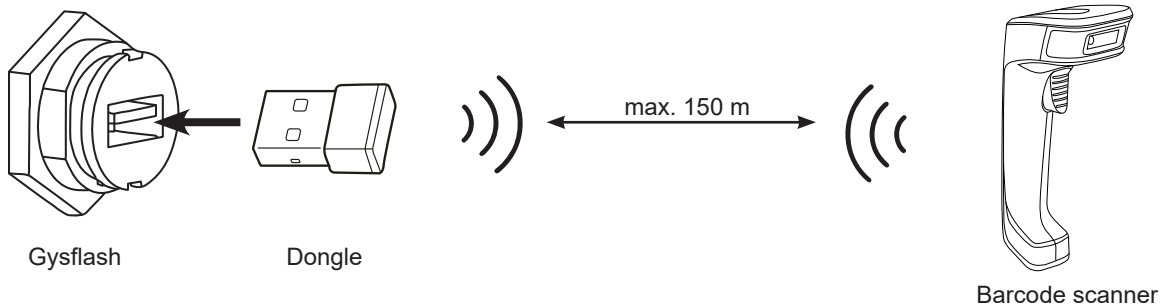

- DO NOT use the USB cable to connect your barcode scanner to Gysflash.

Technical Features

Communication mode	Wireless 2.4 GHz
Transmission distance	Max. 150 m
Input voltage (USB)	5 VDC
Input current (USB)	< 0.4 A
Battery capacity	2200 mAh
Charging time	6.5 hours
Continuous working time	> 16 hours
Symbologies	1D: Codabar, Code39, Code32, Interleaved 2 of 5(1T25), Industrial 2 of 5, Matrix 2 of 5, Code93, Code11, Code128, Gs1-128,UPC-A, UPC-E, EAN/JAN-8, EAN/JAN-13, ISBN, ISSN, GS1 databar, GS1 databar limited, GS1 databar expanded, ISBT 2D: PDF417, Micro PDF417, QR Code, Micro QR, Data Matrix, Aztec
Dimensions / weight	180 x 60 x 80 mm / 160 g
Operating temperature	-20°C — +55°C